

T/C TRANSMITTER


P-T/C



A converter designed for convert the input signal that receives from T/C temperature sensor into isolated process signal

- Long distance transmission between the T/C and the transmitter.
- Combination with intrinsic safety barriers.
- Contains linearizer circuit.
- 1 or 2 outputs are available from 1 input
- Transformer isolation type
- Slim wide 18mm

MODEL & SUFFIX CODE SELECTION

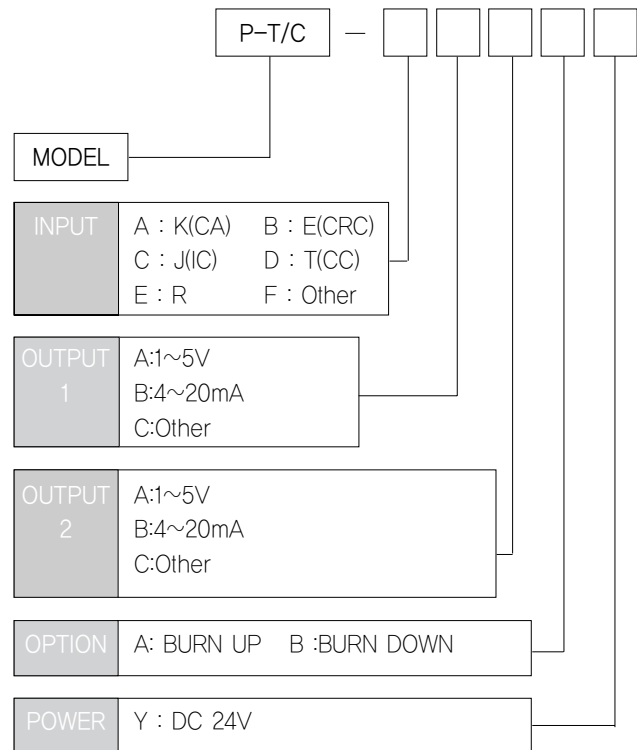

GENERAL SPECIFICATIONS

Isolation/Type	Input to output to power/Transformer isolation type
Power Supply	DC24V \pm 2V, (ripple 10%) 100mA(full load)
Accuracy	\pm 0.2%(Max)
Temp Coefficient	\pm 0.015%
Linearity	\pm 0.02% F,S
Insulation Resistance	Greater than 100M Ω with DC 500V
Front Adjustments	Zero and Span \pm 5%
Overrange Output	approx.-10% ~ 110% at DC 1~5V
Response Time	\leq 0.2 sec (0~90%)
Operating Temperature/Humidity	0~60°C / 90%(N.C)
Storage Temperature/Humidity	-20~80°C / 95%(N.C)
Dimensions	W18xH100xD112(mm)
Case Material	ABS Resin (black)
Weight	about 200g
Mounting	Rail mounting Type

SIGNAL TRANSMITTER

P-Unit series

INPUT & OUTPUT SPECIFICATIONS

Input Impedance


T/C	Usable Range °C	MIN SPAN °C
R-TYPE	50 ~ 1760	360.0
S-TYPE	50 ~ 1700	380.0
K-TYPE	-200 ~ 1370	300.0
E-TYPE	-200 ~ 700.0	200.0
J-TYPE	-200 ~ 800.0	200.0
T-TYPE	-200 ~ 400.0	50.0

Output Load Resistance


Output	1 Point	2 Point		Remark
	Output	Output-1	Output-2	
4 ~ 20mA	700Ω	600Ω	350Ω	(Max)
0 ~ 20mA	700Ω	600Ω	350Ω	(Max)
2 ~ 10mA	1200Ω	1200Ω	700Ω	(Max)
1 ~ 5V	5000Ω	5000Ω	5000Ω	(Min)
0 ~ 1V	1000Ω	1000Ω	1000Ω	(Min)

BLOCK DIAGRAM

1 Point Output

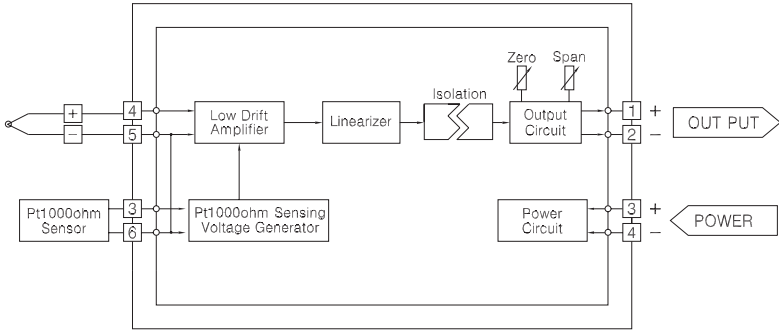

2 Point Output

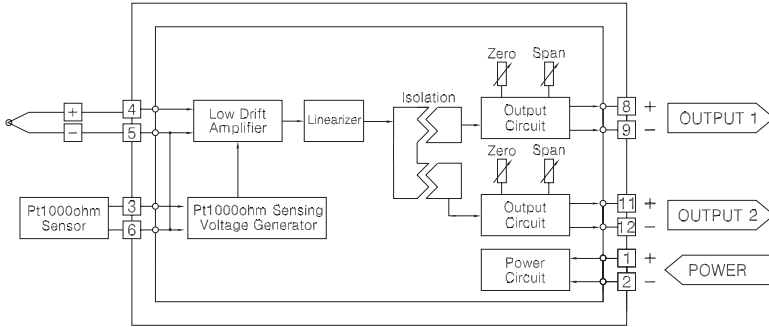

DIMENSIONS (unit:mm)

